



40K Series ---Thermal Fuse

Safety Electronics Technology


Technical Datasheet

Model No.	Tf (°C)	Fuse-Temp (°C)	Current Capability (8×20 μ S)	Tm (°C)	Rated Current (A)	Rated Voltage(V~)	RoHS
40K115	115	111±2	40KA	200	30A	250	▲
40K130	130	121±2	40KA	200	30A	250	▲
40K136	136	131±2	40KA	200	30A	250	▲
40K150	150	145±2	40KA	200	30A	250	▲



Sample

Dimension

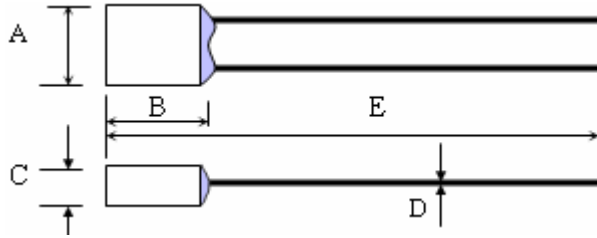

A	B	C	D	E
12 ± 2.0 mm	11.5 ± 2.0 mm	5.2 ± 0.8 mm	2.0 ± 0.5 mm	50 ± 5 mm

Features:

- High surge withstanding ability up to 40kA (8/20 μ s)
- Suitability of automatic soldering process
- No Contact Resistance
- Accuracy of cutoff temperature
- Rapid and reliable fusing action

Applications:

- Protection of MOV
- Transformer
- Lithium Battery
- House Appliance
- Motor
- Capacitor
- Power Surge Strip
- ...

* Xiamen SET Electronics Co., Ltd reserves the right to modify the characteristics published in this leaflet.