

Features


- Fast response times
- Very small size
- Great withstanding surge current
- Excellent non-linearity voltage
- Low leakage current
- Low capacitance(<1pf)
- RoHS compliant

Application

- Telephone\Fax\Modem
- Satellite Antenna
- Amplifier
- Cassette
- Radio
- Alarm and sensor



Structure

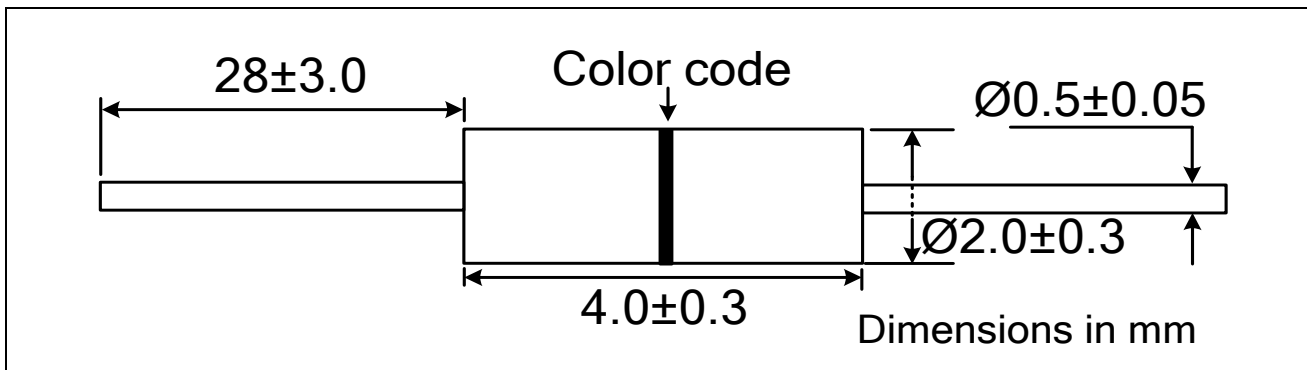

Color code

Color code 1	Color code 2	Color code 3
Product code	Mouth	Week

Electrical Specifications

Part Number	DC Spark-Over Voltage		Insulation resistance at 100 V _{DC}	Capacitance @1KHz, 6V	Surge current capacity	Surge Life Test
	Vs(V)		IR (MΩ)	C (pF)	8/20μS (A)	8/20μs 100A
SPGT4R2-231M	185	276	>100	<1	500	150 times

Part Number System

SPG	T4R2	231	M
Spark Gap	Diameter: Ø2.0×T4.0	DC Spark-over Voltage 230×10 ¹	Tolerance
			20%

Package Information

Quantity: 4000PCS, tape

CONTACT INFORMATION

SHANGHAI CHANGYUAN WAYON CIRCUIT PROTECTION CO., LTD.

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201202

Tel: 8621-68960547 Fax: 8621-68960743 Email: microele@way-on.com

WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.