


## Features

- 2-electrode arrester
- Very small size
- Extremely fast response time
- Stable performance over life
- Extremely low capacitance (<1.5pF)
- High insulation resistance

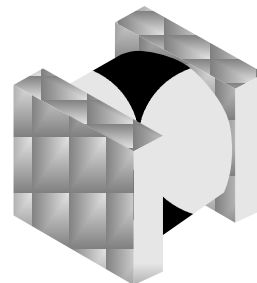

## Applications

- Modem
- Splitter
- Base stations


## Electrical specifications

DC spark-over voltage <sup>1) 2)</sup>	230 ± 20	V %
Impulse spark-over voltage at 100 V/μs - typical values of distribution at 1 kV/μs - typical values of distribution	< 500 < 600	V V
Service life 5 operations 50 Hz, 1 s 10 operations 8/20 μs 300 operations 10/1000μs	5 5 50	A kA A
Insulation resistance at 100 VDC	> 1	GΩ
Capacitance at 1 MHz	< 1	pF
Arc voltage at 1 A	~ 11	V
Glow to arc transition current	~ 0.5	A
Glow voltage	~ 80	V
Weight	~ 1.2	g
Operation and storage temperature	-40 ~ +90	°C
Climatic category (IEC 60068-1)	40/ 90/ 21	
Marking, blue negative		

1) At delivery AQL 0.65 level II, DIN ISO 2859.

2) In ionized mode.


## Dimensional drawing

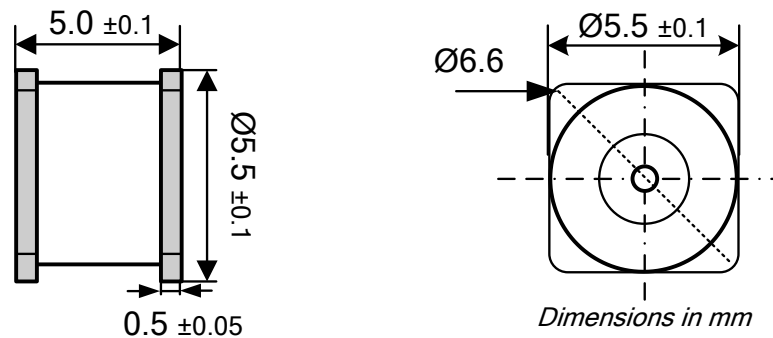

## Cautions and warnings

- Surge arresters must not be operated directly in power supply networks.
- Surge arresters may become hot in case of longer periods of current stress (danger of burning).
- Surge arresters may be used only within their specified values. In case of overload, the headcontacts may fail or the component may be destroyed.
- Damaged surge arresters must not be re-used.

## Part Numbering System

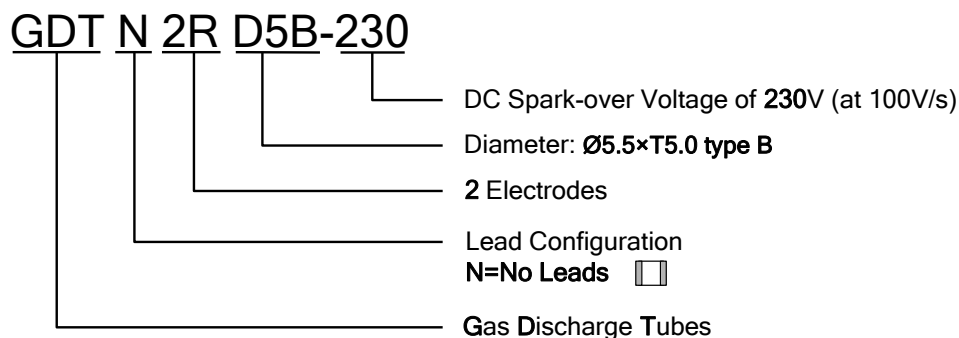

## Package Information

900Pcs/Reel Box

Reel Box: Ø330\*30 mm

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame.

## CONTACT INFORMATION

**SHANGHAI CHANGYUAN WAYON CIRCUIT PROTECTION CO., LTD.**

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201202

Tel: 86-21-50310888 Fax: 86-21-50757680 Email: market@way-on.com

WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.